

Three Dimensions Position Based Adaptive Real-Time Routing Protocol for Wireless Sensor Networks

Fariborz Entezami · Christos Politis

Received: date / Accepted: date

Abstract Devices for Wireless Sensor Networks (WSN) are limited by power and thus routing protocols should be designed with this constrain in mind. WSNs are used in three dimensions (3D) scenarios such as surface of sea or lands with different level of highs. This paper presents and evaluates Three Dimensions Position Based Adaptive Real-Time Routing Protocol (3DPBARP) as a novel, real-time, position based and energy efficient routing protocol for Wireless Sensor Networks (WSN)s. 3DPBARP is a lightweight protocol that reduces the number of nodes which receive the RF signal using a novel Parent Forwarding Region (PFR) algorithm. 3DPBARP as a Geographical Routing Protocol (GRP) reduces the number of forwarding nodes and thus the traffic and packet collision in the network. A series of performance evaluations through Matlab and Omnet++ simulations show significant improvements in network performance parameters and total energy consumption over 3D Position Based Routing Protocol (3DPBRP) and Directed Flooding Routing Protocol (DFRP).

Keywords GRP · VNP · 3DPBRP · 3DPBARP · Rainbow · DFRP.

Fariborz Entezami
Wireless Multimedia & Networking (WMN) Research Group
Faculty of Science, Engineering and Computing (SEC)
Kingston University London
Penrhyn Road, Kingston Upon Thames, KT1 2EE
E-mail: F.Entezami@kingston.ac.uk Tel.: +44 (0) 208 417 7025

Christos Politis
Wireless Multimedia & Networking (WMN) Research Group
Faculty of Science, Engineering and Computing (SEC)
Kingston University London
Penrhyn Road, Kingston Upon Thames, KT1 2EE
E-mail: C.Politis@kingston.ac.uk Tel.: +44 (0) 208 417 2653

1 Introduction

The main duty of Wireless Sensor Network (WSN) as a distributed computing network is collecting data from a large number of nodes that have the capacity to sense the environment, process data and also communicate over a short range. WSN applications collect data from wireless sensors and an appropriate routing protocol could help them to achieve scalability and improve performance. In real-life's WSN applications, wireless sensor nodes are deployed in Three Dimensions Coordinate System (3D) environments such as mountains or sea surfaces. Most of the Position Based routing protocols consider the topology as a two dimensions scenarios. In this paper deploying wireless sensors in 3D environments has been considered. Data collection protocols can form planner or tree topology that could be in cluster or mixed data collection form. Three Dimensions Position Based Adaptive Real-Time Routing Protocol (3DPBARP) is one of the many-to-one routing protocols which is based on spanning tree method [1] [2]. 3DPBARP establishes at least one data collection tree with a sink as the root node in the topology. All data which is produced by sensors are forwarded to the root node. Each node is not only responsible for sending its own data but also for relaying other's data, so that they cover more distance to root node [3] [4]. Trickle algorithm [5] optimizes the overhead cost and makes the routing protocols more flexible. The control protocol packets are sent based on changes in topology and if there is no change in topology, the interval times (duration) between when updates are sent is increased with a resulting decrease in the number of control packets. It also makes routing protocols react quickly and be adaptable to any changes in topology and if any change in topology is sensed then the interval time is reset to minimum in order to update the topology very quickly [6] [7]. 3DPBARP enhances greedy forwarding by considering congestion and packet delivery information when looking the best path to the destination. 3DPBARP uses a mechanism for choosing a parent that it is based on Spherical Distance (SD) value of each neighbour that chooses the best possible parent between existing qualified neighbours. 3DPBARP avoids occurring a loop in topology by using some mechanism. It also uses the Rainbow mechanism that make 3DPBARP be able to avoid dead end routes [8]. 3DPBARP uses a new mechanism to make it more energy efficient than other existing algorithm. The proposed protocol uses a unique restricted Parent Forwarding Region (PFR) based on the algorithm that limits the number of nodes that receive the packets. It decreases the Radio Frequency (RF) range to the minimum to cover the nodes parent only and for this reason other nodes do not consume energy to receive the signal and retransmit them. Geographical Routing Protocols (GRP)s make all nodes be able to learn more about its location and also the position of neighbours and the sink. GRPs could make decisions with better performance in real-time and dynamic scenarios. GRPs decrease the overhead of the protocols significantly and makes them more efficient. The disadvantages of GRPs are the cost of additional hardware and also the accuracy of location determination which depends on the mechanism and techniques whether the location

of each node is calculated. Some techniques such as radio ranging have less accuracy and some techniques such as Global Positioning System (GPS) have more accuracy [9] [10] [11].

In this paper 3DPBARP as a 3D, real-time and geographical routing protocol has been proposed that provide a soft real-time capability for an effective heuristic solution for void node problem or hole problem. The Void Node Problem (VNP) or hole problem is called to a situation when a packet arrives at a node that does not have any neighbour to forward the packet toward the sink. The Rainbow mechanism is used to avoid dead end routes. The proposed protocol also uses a unique restricted PFR based algorithm that limits the number of nodes that receive the packet.

This paper is organized as follows: section II describes previous works and section III shows the 3DPBARP design details and system model. Evaluation and results from simulations come in section V and finally conclusion is provided in section VI.

2 Related Works

O-CTP [12] is based on investigation of WSN routing protocols behaviour in networks that are affected by interference. O-CTP is a hybrid routing protocol that uses the high packet delivery ratio of opportunistic routing in error-prone networks and it also is energy efficiency routing protocol [13].

ICTP [14] uses of both long with good link quality path and also short with bad link quality. It may decrease the reliability but it improves efficiency to avoid congestion. They have shown that the energy consumption in ICTP is less than CTP in same scenarios based on reducing possibility of congestion.

BCTP [15] is balanced version of CTP that enable the network to avoid the heavy traffic nodes. It uses average transmission rate as a metric. BCTP has been evaluated by a testbed and the results show that the load in hot spot drops by 61.9%. RAP [16] is a real-time GRP which uses the velocity of each packet as a gradient to deliver the packets. Each velocity is calculated based on the distance to the destination and its delivery deadline. The packets with higher velocities can be sent earlier than packets with lower velocities. However, this protocol does not provide any guarantee in end-to-end real time delivery. EDF [17] provides a real-time decentralized scheduling that guarantee the end-to-end delivery but it needs a priori defined schedule that is not feasible in most of WSNs applications. SPEED [18] is a real-time GRPs that uses neighbour information to estimate distance in routing protocol. SPEED lets each node decides which neighbour be the next hop forwarding node and in case of not existing any suitable node in neighbours, the node with the lowest miss ratio is used for forwarding the packets. MMSPEED [19] is a enhanced version of SPEED that focused on reliability levels and multiple timeline. It uses resources with better performance than SPEED. RTLD [17] is a real-time routing protocol with load balancing based on link quality, packet delay and remaining power in the next hop neighbours. All the above mentioned pro-

protocols are based on 2D coordinate systems and need neighbour information to decide about next hop to forward the packets. ABLAR [20] is a 3D GRP that delicate to VNP and it restricts the packet forwarding to a cubical region only. 3D Greedy routing [21] is a 3d GRP that is based on density populated of wireless nodes and it also has issue regarding VNP in low density populated nodes scenarios. 3DPBARP [10] is a 3D GRP that control the number of forwarding nodes and delivers packets within a specific deadline. In this protocol, the forwarding decisions depend on the expected number of nodes toward the sink and also the queuing delay in the forwarding nodes [22].

3 Design

3.1 Motivation

WSN consists of small devices for while energy consumption is a vital key. Any protocols that are used have to be energy aware. Three Dimensions Position Based Routing Protocol (3DPBRP) is a 3D and position basaed version of Collection Tree Protocol (CTP) as a lightweight, simple reliable, efficient, best-effort, many-to-one routing protocol. Using the CTP concept in a 3D routing protocol is one of the motivations of this paper. Adding energy consuming efficiency in current routing protocols is another motivation for tis paper. Decreasing the number of nodes that receive unrelated signals decreases the number of retransmissions and could save more energy. Energy consuming in a transponder is based on the range of the coverage by RF, the energy consumed in transponder being propotional to the square of RF range radius. Any reduction in RF transmission range could save significant energy in wireless nodes.

3.2 3DPBARP

It is assumed that the nodes are deployed in a static scenario and in a uniform randomly distributed manner. All nodes are in the same spherical transmission range and they are identical and every node knows its own location. The location of each node is represented in a Cartesian coordinates system (X,Y,Z) which can be obtained from GPS module. The GPS module calculates the position of each node and it will be used only at the time of deployment and after that it will be switched off to save energy [23]. The goal of the proposed protocols is to minimize the RF range based on parent location. After parent selection in PFR, the position of parents is sent to its entire child. PFR technique in 3DPBARP uses the positions data to minimize the RF range. The RF range is calculated in location management phase and the transponder of the node set the transponder power to cover only the minimized RF range that is calculated based on node and parent locations. Location management phase is one of the key factors in 3DPBARP. The Parent Forward Region

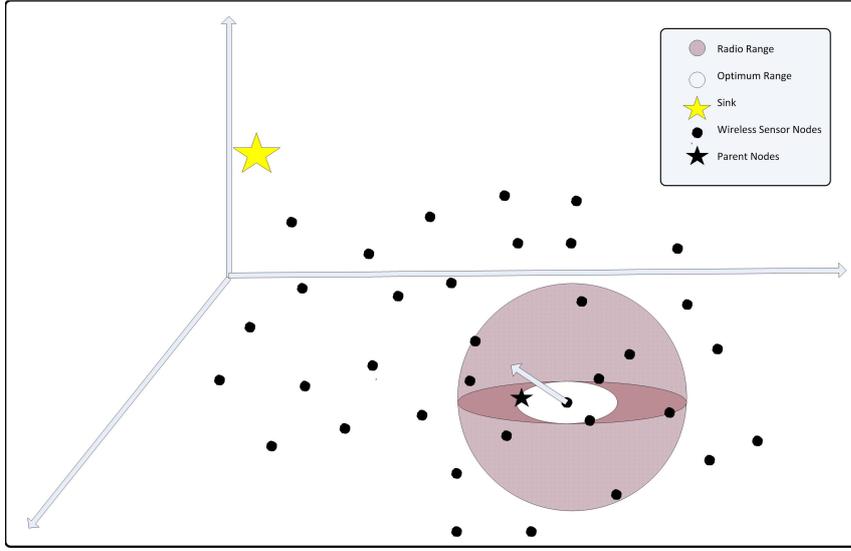


Fig. 1 Optimum Transmission Rang

(PFR) is calculated in location management phase to ideally contain minimum forwarding nodes to limit the number of retransmitting nodes in group of one hop neighbours. In PFR, the parent location denotes as (X_p, Y_p, Z_p) and the node location denotes as (X_n, Y_n, Z_n) .

The parent location information is provided to nodes during the parent selection mechanism. Then the neighbours node calculates the distance between node to its parent. In forwarding management phase to avoid redundant packet transmission in the network, the transponder power set to cover only the Minimum Transmission Distance (MTD).

$$MTD = \sqrt{(X_p - X_n)^2 + (Y_p - Y_n)^2 + (Z_p - Z_n)^2} \quad (1)$$

Where (X_p, Y_p, Z_p) denotes to position of parent and (X_n, Y_n, Z_n) denotes to position of the node. Each node selects its parent from a group of its qualified neighbours that have already advertised their Minimum Root Distance (MRD) values. The neighbour that is selected as the nodes parent is the neighbour with the least MRD value. The second goal of proposed protocols is to use Rainbow mechanism to solve VNP to enhance the reliability of protocol and increase the packet delivery ratio. The proposed protocol has three main functionalities, parent selection that selects the best parent from the qualified neighbours of the node, location management that calculates the position of each node and the minimum radius of RF range and the VNP handling that avoids to forward the packets toward the hole or dead end.

3.3 Parent Selection in 3DPBARP

A few nodes in the network advertise themselves as sink. Other nodes in the network form a tree network topology and send data toward these root nodes. Each node chooses the path to root by selecting the next hop based on a routing gradient [11]. 3DPBARP uses Surface Distance (SD) as its routing gradient. Each node is labelled as a MRD value. Roots MRD value is 0 and others nodes' value is calculated by formula 2:

$$Node(MRD) = Parent(MRD) + Link(SD) \quad (2)$$

$$Link(SD) = \sqrt{(X_p - X)^2 + (Y_p - Y)^2 + (Z_p - Z)^2} \quad (3)$$

Where $Link(SD)$ denotes to surface distance of node and (X_p, Y_p, Z_p) denotes to position of parent an (X, Y, Z) denotes to position of the node. Each node selects its parent from a group of its qualified neighbours that have already advertised their MRD values. The neighbour that is selected as the nodes parent is the neighbour with the least MRD value.

3.3.1 Rainbow Mechanism in 3DPBARP

In this section the Rainbow mechanism has been considered and it has been demonstrated how it is used in 3DPBARP to avoid dead ends routes.

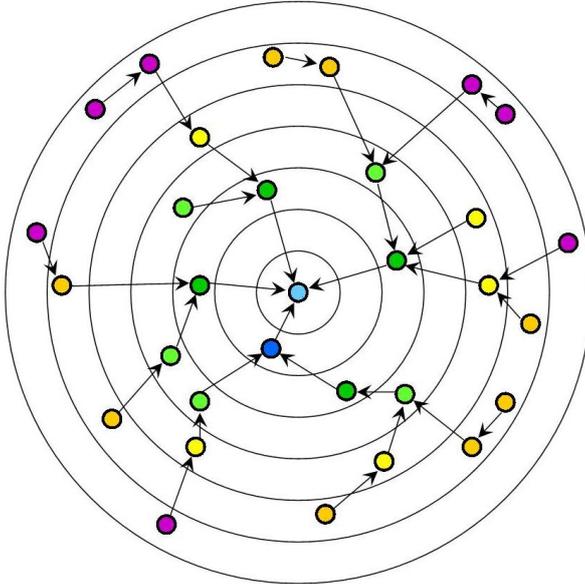


Fig. 2 Rainbow colouring technique

The principle of Rainbow is forward the packets toward the sink. In this mechanism every node has a colour code based on how far is from the sink. The order list of colour shows that how by selecting the next relay node could travel toward the sink. Let $C_k(i)$ the colour code of node i and node i will forward only to next relay nodes with colour code equal to C_{k-1} or C_k . It will guarantee that the packets travel toward the sink and it avoids to send the packets toward dead end routes [24]. Figure 2 shows how the nodes select their parents based on Rainbow mechanism. Each node selects its parents with its colour code or with colour code in order to be close to sink.

The colour code in each node is calculated based on a counter. The rainbow counter is the number of received packets from the sink. Any node with higher value of this counter shows that it is closer to the sink than other nodes with lower value.

3.4 Loop avoidance in 3DPBARP

3DPBARP uses a detection mechanism during the data packet transmission to validate the routing path and topology. This mechanism makes 3DPBARP avoid loops by checking the previous $N(l)$ nodes that packet comes through. If the current node is in the list of $N(l)$ last nodes, a network loop will occur and reconsidering the topology will be needed to put in order. 3DPBARP uses a detection mechanism during the data packet transmission to validate the routing path and topology. This mechanism makes 3DPBARP to avoid loops by checking the last $N(l)$ nodes that packet comes to this node through. $N(l)$ sets in the initiate stage.

4 Evaluation System Model

The system evaluation has been performed through massive simulations. Omnet++ has been used as WSN simulator and Matlab has been used for simulating the energy model. Each scenario runs more than 20 times to collect the reliable results with confidence intervals of 0.95.

4.1 System Channel Model

The simulations run on a field area of $200 * 200 * 100$ meters and the radio feature CC2420 has been used as radio module that is working on IEEE 802.15.4 standard [25]. Simulations have been run from 18 seconds up to 3000 seconds. The variety of radio channel has been set up by Wireless Channel Sigma that are 0,1,3,5. Wireless Channel Sigma shows the standard deviation of communication channel diversity [26]. The received signal strength at a wireless node in real scenarios does not only depend on distance from the transmitter but also

on shadowing effects. The sigma parameters represent the random shadowing effects in the wireless channel parameters.

Radio Collision Mode has been selected to 1 that puts more collision than normal.

4.2 Energy Consumption Model

The energy consumption models are compared by a study in [27] that shows the components that consume energy in WSNs. In this paper, it has been assumed that the power energy that is consumed is mostly derived by the RF module for transmission signals which are involved sending and receiving packets in wireless sensor nodes.

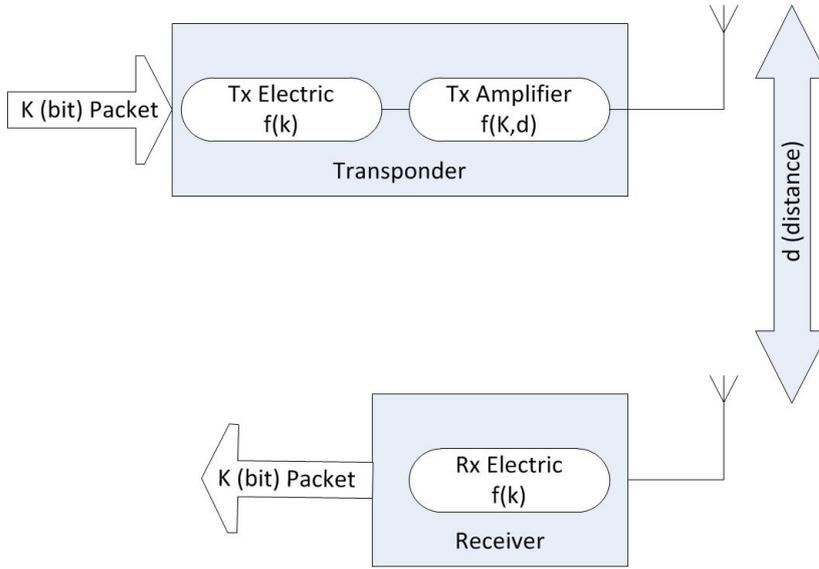


Fig. 3 Energy Model System

Following the [28] [29] [30] researches, the mathematical model for energy consumption by transmitting and receiving packets per bits of each sensor nodes are calculated as following. The energy consumption in RF module in receiver is given as:

$$E_{Rx}(k) = E_{elec} \times k \quad (4)$$

Where E_{Rx} is the energy consumption in receiver node, E_{elec} is the energy required to process one bit in the electronic modules and k is the length of message (bit) and the energy consumption in transmitter RF module is given as:

$$E_{Tx}(k, d) = E_{elec} \times k + E_{amp} \times k \times d^2 \quad (5)$$

Where E_{Tx} is the energy consumption in transmitter node, E_{amp} is the energy required to transmit one bit in the RF module and k is the length of message (bit) and d denotes the distance between transmitter and receiver measured in meter.

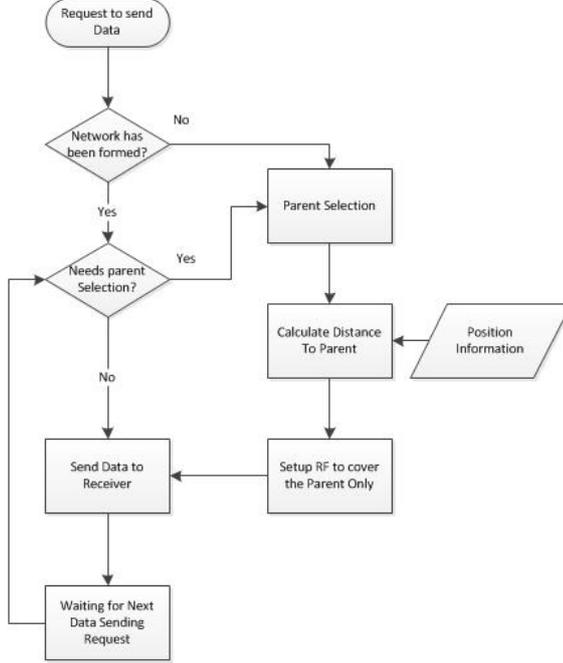


Fig. 4 3DPBARP Algorithm

Figure 4 shows the flow chart of 3DPBRP algorithm. It shows for sending each packet it checks the status of parent and if the protocol needs to go to parent selection mechanism then it selects a new parent and then set the RF to a range that cover only this new parent.


5 Performance Evaluation

The results have been collected in different scenarios in different number of nodes in the field, RF range and the number of packets with confidence intervals of 0.95. In this experience 3DPBRP as 3D and position based version of CTP, 3DPBARP and Directed Flooding Routing Protocol (DFRP) have been compared. Table I shows the parameters of simulations. Omnet++ has been employed as simulation to measure Packet Delivery Ratio (PDR) and delay. End-to-end delay has been measured in all three routing protocols and also PDR. Matlab has been used for simulating the energy model. The total energy, number of retransmitted messages and also numbers of received messages in

Table 1 Omnet ++ Simulation Parameters

Simulation Parameters	
Number of nodes	10,20,...,100
Node Deployment	Random
Field Area	200 X 200 X 100 (m)
E_{elec}	50 nJ/bit
E_{amp}	100 pJ/bit/m ²
Simulation time	18-3000 Sec
Wireless Channel Sigma	0,1,3,5
Radio Parameters	CC2420
Routing Protocols	CtoNoe, 3DPBARP, DFRP
Application	CtpTesting
App Packet Rate	5
APP Payload	Constant 150 bytes
Max Frame Size	2500 byte
Radio Tx Power	-5 dBm
Radio Collision Model	1

different scenarios have been investigated in this research. The scenarios contain different wireless nodes in the field, different RF range and also different number of messages.

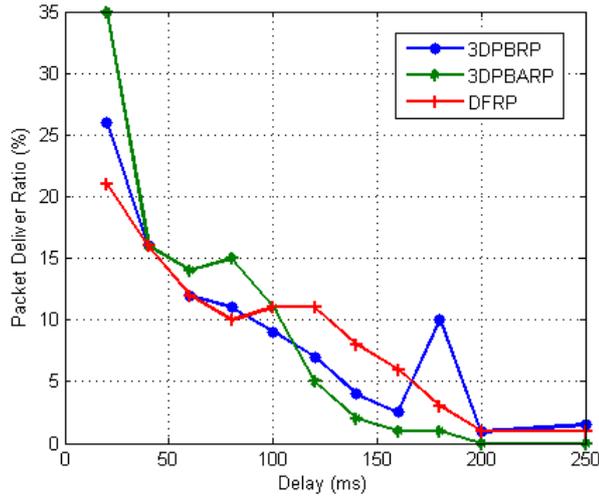**Fig. 5** Packet delivery ratio based on 3DPBRP, 3DPBARP and DFRP

The application layer measures the level of packet latency in (ms). Figure 5 shows the packet delivery delay level in three routing protocols: 3DPBRP, 3DPBARP and DFRP. The results show 3DPBARP has better performance than 3DPBRP and also DFRP in term of packet delivery delay. 3DPBARP has delivered in average about 35% of packets in less than 20 ms instead of

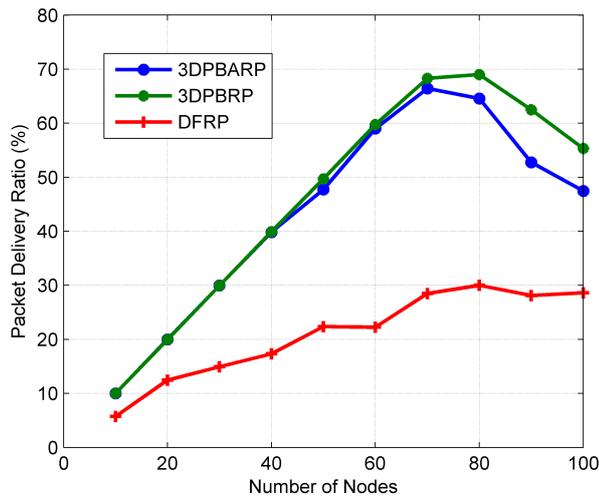


Fig. 6 Packet delivery ratio based on 3DPBRP, 3DPBARP and DFRP

3DPBRP that it delivered about 26%. It is obvious that 3DPBARP has better performance than 3DPBRP in term of packet delivery delay time. Application

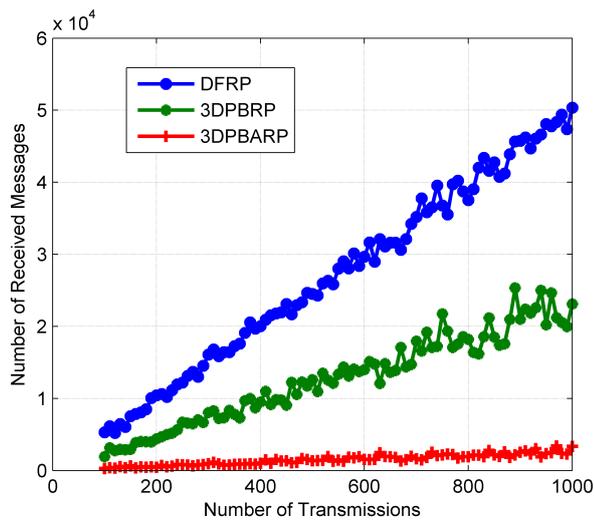


Fig. 7 Number of Received messages in 3DPBARP, 3DPBRP and DFRP

layer also measures the percentage of packet delivery ratio that it shows the amount of packets that successfully received in their destinations. Figure 6 shows the packet delivery ratio in three routing protocols. The results show

3DPBRP and 3DPBARP have the same result in term of packet delivery ratio in scenarios that wireless nodes are less than 70 nodes. When the number of nodes in the fields increases to 70 nodes, it is obvious that 3DPBARP could deliver more packets than 3DPBRP. In scenario with 100 nodes in the fields, packet delivery ratio in 3DPBARP is 55% and 3DPBRP could manage to deliver around 47% of the packets. Figure 7 shows the number of re-

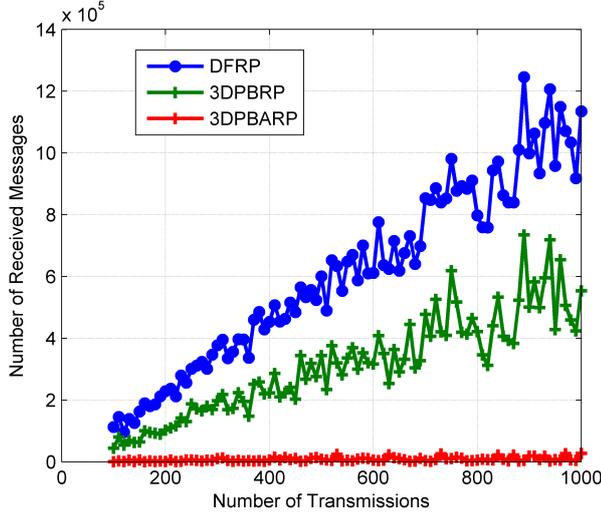


Fig. 8 Number of Received messages in 3DPBARP, 3DPBRP and DFRP

transmitted messages in different number of messages scenarios. In average the 3DPBARP retransmits messages 82% less than DFRP and 48% less than 3DPBRP. Figure 8 shows the number of received messages in different number of messages scenarios. In average, the 3DPBARP retransmits messages 88% less than DFRP and 66% less than 3DPBRP.

Figure 9 shows the total energy consumption in different number of messages scenarios. In average the 3DPBARP consumed energy 87% less than DFRP and 61% less than 3DPBRP.

Figure 10 shows the number of received and retransmitted messages and also the total energy consumption in different number of nodes in the field. Figure 11 shows the number of received and retransmitted messages and also the total energy consumption in different radio frequency ranges in the field.

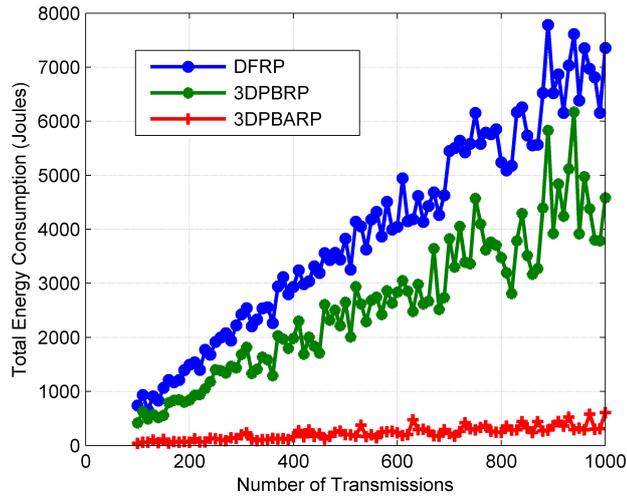


Fig. 9 Total Energy Consumption in 3DPBARP, 3DPBRP and DFRP

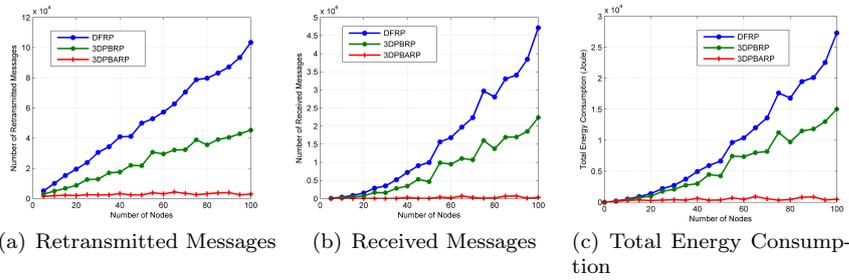


Fig. 10 3DPBARP, 3DPBRP and DFRP in different number of Nodes scenarios.

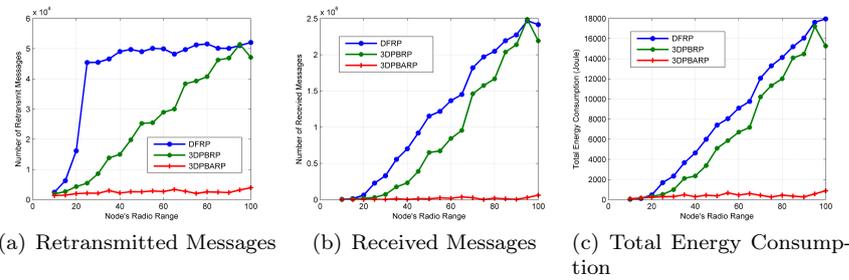


Fig. 11 3DPBARP, 3DPBRP and DFRP in different Radio Range scenarios.

6 Conclusion

This paper proposed 3DPBARP as an Energy Efficient Rainbow Collection Routing Protocol. 3DPBARP has showed a performance improvement in packet

delivery parameters. 3DPBARP performs with more accuracy by using a new parent selection and Rainbow mechanisms to choose the parents with more accuracy. It also employs techniques to avoid loops in the topology. 3DPBARP as a GRP decreases the RF range in each node by reducing the number of nodes which receive the signal, using a new PFR technique. Nodes reduce the RF range to cover their parents only and not any nodes with further distance in location management phase and PFR. A massive simulation on 3DPBARP shows a significant improvement in performance regarding energy consumption compared to 3DPBRP and DFRP in different scenarios. 3DPBARP shows that it could save more than %80 of the total energy consumption in the network by using the special technique in PFR. It also provides better performance in busy and noisy environments in terms of packet delivery time and the ratio of successful packet delivery.

References

1. Y. Song, Y. Chai, F. Ye, and W. Xu, "A novel tinyos 2. x routing protocol with load balance named ctp-ticn," in *Knowledge Engineering and Management*. Springer, 2012, pp. 3–9.
2. W. Yi-Zhi, Q. Dong-Ping, and H. Han-guang, "Pareto optimal collection tree protocol for industrial monitoring wsns," in *GLOBECOM Workshops (GC Wkshps), 2011 IEEE*. IEEE, 2011, pp. 508–512.
3. J. Zhao, L. Wang, W. Yue, Z. Qin, and M. Zhu, "Load migrating for the hot spots in wireless sensor networks using ctp," in *Mobile Ad-hoc and Sensor Networks (MSN), 2011 Seventh International Conference on*. IEEE, 2011, pp. 167–173.
4. F. Entezami and C. Politis, "An analysis of routing protocol metrics in wireless mesh networks," *JOURNAL OF COMMUNICATIONS AND NETWORKING, IEEE*, vol. 4, no. 12, pp. 15–36, December 2014.
5. P. A. Levis, N. Patel, D. Culler, and S. Shenker, *Trickle: A self regulating algorithm for code propagation and maintenance in wireless sensor networks*.
6. O. Gnawali, R. Fonseca, K. Jamieson, D. Moss, and P. Levis, "Collection tree protocol," in *Proceedings of the 7th ACM Conference on Embedded Networked Sensor Systems*. ACM, 2009, pp. 1–14.
7. N. Chilamkurti, S. Zeadally, A. Vasilakos, and V. Sharma, "Cross-layer support for energy efficient routing in wireless sensor networks," *Journal of Sensors*, vol. 2009, 2009.
8. Y. Zeng, K. Xiang, D. Li, and A. V. Vasilakos, "Directional routing and scheduling for green vehicular delay tolerant networks," *Wireless networks*, vol. 19, no. 2, pp. 161–173, 2013.
9. C. Petrioli, M. Nati, P. Casari, M. Zorzi, and S. Basagni, "Alba-r: Load-balancing geographic routing around connectivity holes in wireless sensor networks."
10. S. Al Rubeaai, B. Singh, M. Abd, and K. Tepe, "Region based three dimensional real-time routing protocol for wireless sensor networks," in *SENSORS, 2013 IEEE*, Nov 2013, pp. 1–4.
11. M. Li, Z. Li, and A. V. Vasilakos, "A survey on topology control in wireless sensor networks: Taxonomy, comparative study, and open issues," *Proceedings of the IEEE*, vol. 101, no. 12, pp. 2538–2557, 2013.
12. J. Flathagen, E. Larsen, P. E. Engelstad, and O. Kure, "O-ctp: Hybrid opportunistic collection tree protocol for wireless sensor networks," in *Local Computer Networks Workshops (LCN Workshops), 2012 IEEE 37th Conference on*. IEEE, 2012, pp. 943–951.
13. F. Entezami, M. Tunnicliffe, and C. Politis, "Find the weakest link: Statistical analysis on wireless sensor network link-quality metrics," *Vehicular Technology Magazine, IEEE*, vol. 9, no. 3, pp. 28–38, Sept 2014.

14. Y. Li, H. Chen, R. He, R. Xie, and S. Zou, "Ictp: An improved data collection protocol based onctp," in *Wireless Communications and Signal Processing (WCSP), 2010 International Conference on*, 2010, pp. 1–5.
15. J. Zhao, L. Wang, W. Yue, Z. Qin, and M. Zhu, "Load migrating for the hot spots in wireless sensor networks using ctp," in *Mobile Ad-hoc and Sensor Networks (MSN), 2011 Seventh International Conference on*, 2011, pp. 167–173.
16. O. Chipara, Z. He, G. Xing, Q. Chen, X. Wang, C. Lu, J. Stankovic, and T. Abdelzaher, "Real-time power-aware routing in sensor networks," in *Quality of Service, 2006. IWQoS 2006. 14th IEEE International Workshop on*, June 2006, pp. 83–92.
17. F. Cadger, K. Curran, J. Santos, and S. Moffett, "A survey of geographical routing in wireless ad-hoc networks," *Communications Surveys Tutorials, IEEE*, vol. 15, no. 2, pp. 621–653, Second 2013.
18. T. He, J. Stankovic, T. Abdelzaher, and C. Lu, "A spatiotemporal communication protocol for wireless sensor networks," *Parallel and Distributed Systems, IEEE Transactions on*, vol. 16, no. 10, pp. 995–1006, Oct 2005.
19. E. Felemban, C.-G. Lee, and E. Ekici, "Mmspeed: multipath multi-speed protocol for qos guarantee of reliability and timeliness in wireless sensor networks," *Mobile Computing, IEEE Transactions on*, vol. 5, no. 6, pp. 738–754, June 2006.
20. A. Ahmed and N. F. ., "A real-time routing protocol with load distribution in wireless sensor networks," in *Computer Communication*, vol. 31,14, 2008, pp. 3190–3203.
21. G. Kao, T. Fevens, and J. Opatrny, "3-d localized position-based routing with nearly certain delivery in mobile ad hoc networks," in *Wireless Pervasive Computing, 2007. ISWPC '07. 2nd International Symposium on*, Feb 2007, pp. –.
22. P. Li, S. Guo, S. Yu, and A. V. Vasilakos, "Codepipe: An opportunistic feeding and routing protocol for reliable multicast with pipelined network coding," in *INFOCOM, 2012 Proceedings IEEE*. IEEE, 2012, pp. 100–108.
23. F. Entezami, T. A. Ramrekha, and C. Politis, "An enhanced routing metric for ad hoc networks based on real time testbed," in *Computer Aided Modeling and Design of Communication Links and Networks (CAMAD), 2012 IEEE 17th International Workshop on*. IEEE, 2012, pp. 173–175.
24. Y. Li, H. Chen, R. He, R. Xie, and S. Zou, "Ictp: An improved data collection protocol based onctp," in *Wireless Communications and Signal Processing (WCSP), 2010 International Conference on*. IEEE, 2010, pp. 1–5.
25. J. Adams, "An introduction to ieee std 802.15.4," in *Aerospace Conference, 2006 IEEE*, 2006, pp. 8 pp.–.
26. F. Entezami and C. Politis, "Deploying parameters of wireless sensor networks in test bed environment," in *Wireless Communications and Networking Conference Workshops (WCNCW), 2014 IEEE*, April 2014, pp. 145–149.
27. M. C. Liu, H. Chen, "A survey of wireless sensor networks," in *in Proc. Conf. Dependable Computing, Yichang, China*, Jan 2000, pp. 10 pp. vol.2–.
28. G. . S. G. . G. R. Li, Y. ; Xiao, "Algorithms for finding best locations of cluster heads for minimizing energy consumption in wireless sensor networks," *Clustering Algorithms ; Energy Efficiency ; Free-Space Model ; Multipath Model ; Wireless Sensor Networks, Wireless Networks*, vol. 19, no. 7, pp. 1755–1768, October 2013.
29. S. Lindsey, C. Raghavendra, and K. Sivalingam, "Data gathering algorithms in sensor networks using energy metrics," *Parallel and Distributed Systems, IEEE Transactions on*, vol. 13, no. 9, pp. 924–935, Sep 2002.
30. W. Heinzelman, A. Chandrakasan, and H. Balakrishnan, "Energy-efficient communication protocol for wireless microsensor networks," in *System Sciences, 2000. Proceedings of the 33rd Annual Hawaii International Conference on*, Jan 2000, pp. 10 pp. vol.2–.